






RGB+CCT Remote Control (GL-RC-006Z)

This manual describes RGB+CCT remote control used for our RGB+CCT products. Remote control can control the LED lights up to six different Zones, change the color, dim/brighten the lights, warm/cool white, different programs. In this manual, you will learn.



Battery Installation

Please take the remote control and carefully press the battery cover and push it away in a downward motion. Install two AAA batteries, exactly match the negative (-) pole of each battery to the largest spring. Don't touch the color ring when you install the batteries. Place the battery cover back and install tightly.



LED-Trading Tobias Ebert
Schoeneicher Str. 42, Schoeneiche b. Berlin, Germany, 15566
0049 30 641 689 17 info@led-trading.de

How to link & use with remote control

1. Within 3 seconds after the light power on, click the "on" button in the group to perform code matching. The LED light turns green means successful code matching.
2. Long presses the "off" button of the remote control to enter the night mode, and the brightness and color can still be adjusted at this time.
3. Long presses the small moon key to enter the 60 seconds delay shutdown state.
4. Click the "M" key to enter automatic mode.

How to unlink

1. Within 4s of powering on the light, press the "main on" button 5 times continuously, and the light flashes, indicating that the light is unpaired from all the remote controls that have been coded, and will not be controlled by any remote control.
2. Within 4s of powering on the light, press the paired "group on" button 5 times continuously, and the light flashes, indicating that the light is unpaired from the remote control and will not be controlled by the remote control. Other paired remote controls can still be controlled.

Mode description

- Mode 1: Static warm light (warm light alone)
- Mode 2: Static white light (cold light and warm light are equally bright)
- Mode 3: Static cold light (cold light alone)
- Mode 4: Static red light
- Mode 5: Static green light
- Mode 6: Static blue light
- Mode 7: RGB fade in fade out (Color fade in fade out from red to green, then to blue, then to red, and so on, speed adjustable.)
- Mode 8: RGB flash (Color flash from red to green, then to blue, then to red, and so on, speed adjustable.)
- Mode 9: Color breathing (In this mode, the brightness of current color will cycle from from 100%-0%, then from 0%-100%. At the same time, you can switch the color and have a cycle repeatedly. Pressing switch /mode button to exit this mode.)

How to link & use with zigbee hub

These devices works with many ZigBee Light Link/ZigBee 3.0 Gateways like Philips Hue, Amazon Echo Plus or SmartThings.

Installation:


1. Turn off the Power.
2. Plug in the Bulb.
3. Now you can connect it with the gateway.

Connection with Gateway:

1. Start the device searching on the ZigBee Light Link/ZigBee 3.0 Gateway, it could take some time. If the Gateway does not find the device, plug power off/on or make a reset.
2. After finding the device, the light will turn green, then you can save it to the rooms/groups.
3. Now you can use the device.

Reset:

1. Switch on your device.
2. Now switch off and on within 2 seconds.
3. Repeat off/on five times.
4. Reset is done when the device is switched on in the fifth time and the LED light will be fully bright and flashing for 4 times.

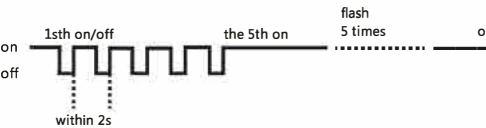


Compability Chart

Gateways	Philips Hue	Amazon Echo Plus	Smart Things	IKEA Tradfri	Conbee	Terncy	Homee	Smart Friends
Item	①	②	③	④	⑤	⑥	⑦	⑧
RGB+CCT	Yes/Ja	Yes/Ja	Yes/Ja	/	Yes/Ja	Yes/Ja	Only/nur RGB	Yes/Ja
RGBW	Yes/Ja	Yes/Ja	Yes/Ja	/	Yes/Ja	Yes/Ja	Yes/Ja	Only/nur RGB
CCT	Yes/Ja	Yes/Ja	Yes/Ja	Only Dimmable	Yes/Ja	Yes/Ja	einzelfarbe single color	Yes/Ja
Dimmer	Yes/Ja	Yes/Ja	Yes/Ja	Yes/Ja	Yes/Ja	Yes/Ja	Yes/Ja	Yes/Ja



①②③④⑤⑥ are already tested by GLEDOPTO, ⑦⑧ are from our customers, just for your information, not verified by GLEDOPTO.

RGB+CCT Spotlight

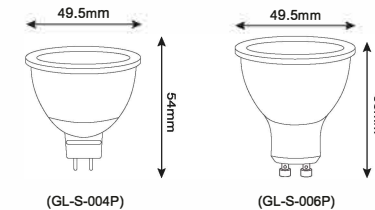

Parameter

Product model	GL-S-004P	GL-S-006P
Input voltage	AC/DC12V(MR16)	AC100~240V(GU10)
Power	4W	5W
Color temperature	2200-6500K	
Luminous Flux	250~300LM	300~450LM
Beam angle	25°	30°
Housing	Aluminum+Plastic	
Working Temp	-20°C~60°C	
CRI	>80	
LED Quantity	1.5W RGB 5050 2pcs 1.0W 3030 6pcs	1.5W RGB 3030 2pcs 1.0W 3030 8pcs


Features:

1. Compatible with ZIGBEE hub, APP control, Voice control.
2. Wireless 6-Zone touch remote control, control distance at least 20 meters.
3. 16 million colors change, dimmable from 1% to 100%.
4. Color temperature from 2200K to 6500K.
5. Saturation control—White and RGB.
- 6' 60s off delay.

Attention:

1. Link the lightbulb with the remote control or the smart phone App before use.
2. Make sure the voltage is between AC100~240V or AD/DC12V.
3. Avoid using under high temperature or moisture.
4. Make sure the power is off before installation.

RGB+CCT Bulb

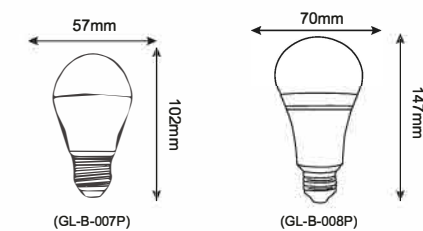


Parameter

Power:6W
Baes:E27/E26/B22
Input Voltage:AC 100~240V
Color temperature:2200-6500K
Luminous Flux:500-550LM
Light Efficiency:90LM/W
Life span:50000h
Working Temp:-20~60 degrees
Material:Aluminum housing+PC Cover

Power:12W
Baes:E27/E26
Input Voltage:AC 100~240V
Color temperature:2200-6500K
Luminous Flux:900-1100LM
Light Efficiency:90LM/W
Life span:50000h
Working Temp:-20~60 degrees
Material:Aluminum housing


Parameter

Power:4W
CRI:>80
PF:>0.5
Lifespan:50000 hours
Input voltage : AC100~240V
Color temperature:2200~6500K
Luminous Flux : 250~300LM
Working Temp : -20°C~60°C
Housing : Plastic + Aluminum
Size : Φ37.5*103.5mm(E12)
Φ37.5*110mm(E14)



(GL-B-001P)

LED Filament Bulb

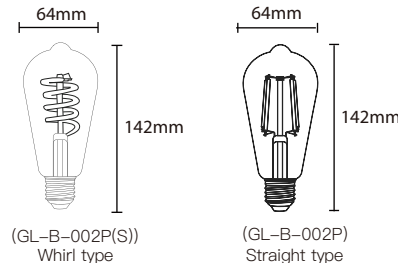


Parameter

Power: 7W
Shape: ST64
Model: GL-B-002P(S)
Size: $\Phi 64 \times 142$ mm
N.W.: 47.0g
G.W.: 89.4g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 1800k~6500k
Luminous Flux: 520LM~680LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass

Parameter

Power: 7W
Shape: ST64
Model: GL-B-002P
Size: $\Phi 64 \times 142$ mm
N.W.: 45.3g
G.W.: 87.7g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 2200k~6500k
Luminous Flux: 800LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass




Parameter

Power: 7W
Shape: A60
Model: GL-B-003P
Size: $\Phi 60 \times 105$ mm
N.W.: 35.7g
G.W.: 66.9g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 2200k~6500k
Luminous Flux: 800LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass

Parameter

Power: 7W
Shape: A60
Model: GL-B-003P(S)
Size: $\Phi 60 \times 105$ mm
N.W.: 37.4g
G.W.: 68.6g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 1800k~6500k
Luminous Flux: 520LM~680LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass



Parameter


Power: 7W
Shape: G95
Model: GL-B-004P(S)
Size: $\Phi 95 \times 142$ mm
N.W.: 61.2g
G.W.: 119.0g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 1800k~6500k
Luminous Flux: 520LM~680LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass

Parameter

Power: 7W
Shape: G95
Model: GL-B-004P
Size: $\Phi 95 \times 142$ mm
N.W.: 59.5g
G.W.: 117.3g
Input Voltage: AC 220~240V
Input Current: 60mA Max 50Hz
Color Temperature: 2200k~6500k
Luminous Flux: 800LM
Working Temp: -20°C~45°C
Zigbee Distance: >50m
RF Distance: >30m
CRI: >80
Material: Aluminum+Glass


Power on status:

Power on and off for 3 times and the light will flash for 2 times, then the light will remember the on/ off status. Repeat the operation again to cancel this function, the light will be on by default when powered on. This function only applies to Filament Bulb.



Parameter


(GL-B-004P(S))
Whirl type



Parameter

(GL-B-004P)
Straight type

RGB+CCT Downlight

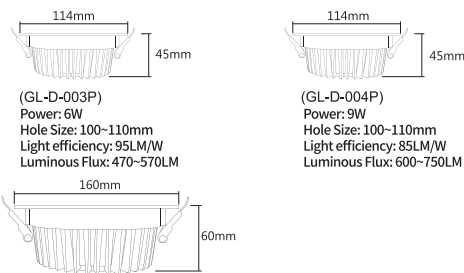

(GL-D-003P)
Power: 6W
Hole Size: 100~110mm
Light efficiency: 95LM/W
Luminous Flux: 470~570LM


(GL-D-004P)
Power: 9W
Hole Size: 100~110mm
Light efficiency: 85LM/W
Luminous Flux: 600~750LM

(GL-D-005P)
Power: 12W
Hole Size: 140~150mm
Light efficiency: 100LM/W
Luminous Flux: 1000~1200LM


Parameter

CRI: >80
PF>0.5
Lifespan: 50000hours
Beam Angle: 120°
SDCM: <5
Input Voltage: AC 100~240V
Color temperature: 2200~6500K
Material: Aluminum+PC Cover

1. Please open the hole on the ceiling according to the correct size of Diagram 1.
2. Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 2 and 3.
3. Connect the driver properly according to the wire connection Diagram 4.



RGB+CCT Downlight (IP54)


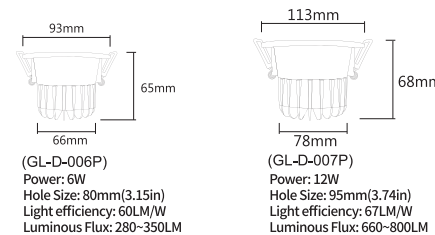


(GL-D-006P)
Power: 6W
Hole Size: 80mm(3.15in)
Light efficiency: 60LM/W
Luminous Flux: 280~350LM


(GL-D-007P)
Power: 12W
Hole Size: 95mm(3.74in)
Light efficiency: 67LM/W
Luminous Flux: 660~800LM

Parameter

CRI: >80
PF>0.5
Lifespan: 50000hours
Beam Angle: 60°
SDCM: <5
Input Voltage: AC 100~240V
Color temperature: 2200~6500K
Material: Aluminum+PC Cover

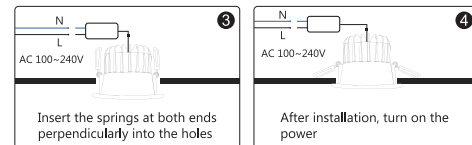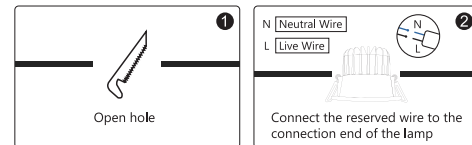



RGB+CCT Downlight (CRI>90)



(GL-D-002P)
Power: 6w
Hole Size: 60mm(2.36in)
Light efficiency: 52LM/W
Luminous Flux: 270~370LM

Parameter

CRI: >90
PF>0.5
Lifespan: 50000hours
Beam Angle: 60°
SDCM: <5
Input Voltage: AC 100~240V
Color temperature: 2200~6500K
Material: Aluminum+PC Cover

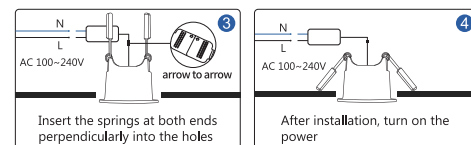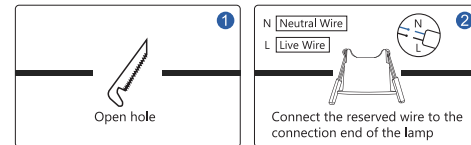

Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the Lamps, and please check the connection of both the cathode and anode.
2. The working Voltage is AC100-240V, the Lamps will be broken if the voltage is higher than 240V.
3. Non-professional user cannot dismantle the Lamps directly, otherwise, it may cause fire and electric shock.
4. The working temperature is -20~45°C; Do not use the device to direct sunlight, moist and other high temperature area.
5. Please do not use Lamps around the mental area and high magnetic field, otherwise, it will badly affect the Use effect.

Disclaimers

- * This manual may contain inaccuracies or discrepancies of the product operations, or typographical errors. Our company will update the contents of this manual according to the improvements and changes of product functions, and regularly improve and update the software and hardware of products described in this manual. The updates will be shown in the latest edition of this manual without further notice.
- * Due to the continuous adoption of new technologies by our company, the product parameters will be changed without any notice in prior.
- * This manual is only for reference and guidance for customers. It does not guarantee that it is completely consistent with the actual product. The actual application is subject to the actual product.
- * The parts, components and accessories mentioned in this manual do not represent the standard configuration of the product. The detailed configuration is subject to the packing list.
- * All texts, tables and pictures in this manual are protected by the relevant national laws, and may not be used without permission by supplier.
- * The copyright and right of the final interpretation of this manual are reserved by our company.